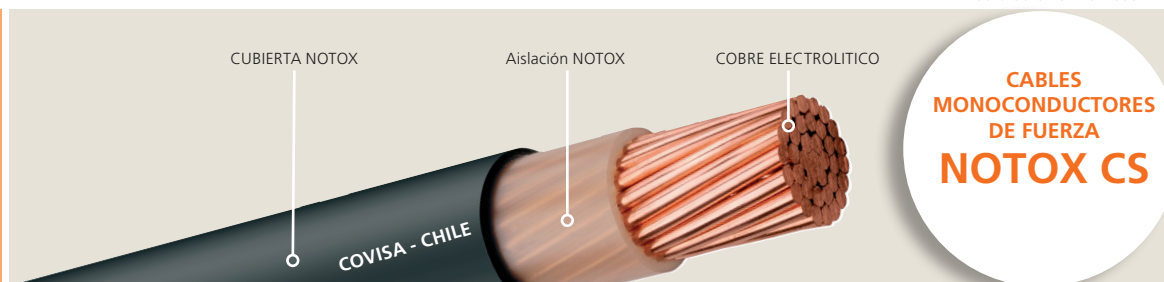


ELABORADORA  
DE COBRE  
VIÑA DEL MAR S.A.

Agua Santa 4303  
Fonos : (32) 2611166\*  
Fax : (32) 2610260  
ventas@covisa.cl



**TABLA DE CABLES MONOCONDUCTORES DE FUERZA NOTOX CS**  
(Características eléctricas y mecánicas).

SECCIÓN MM <sup>2</sup>	CONSTRUCCIÓN		ESPEORES		DIAMETRO EXTERIOR MM	PESO APROX. KG./ KM.
	N° DE HEBRAS	Ø DE HEBRAS	AISLACIÓN MM	CUBIERTA MM		
1,5	7	0,5	0,8	1,4	5,9	49,39
2,5		0,67	0,8	1,4	6,41	63,87
4,0		0,80	1,0	1,4	7,20	87,04
6,0		1,04	1,0	1,4	7,90	113,80
10		1,35	1,0	1,4	8,85	161,70
16		1,70	1,0	1,4	9,90	228,86
25		2,14	1,2	1,4	11,65	377,75
35	19	2,52	1,2	1,4	12,75	444,29
50		1,83	1,4	1,4	14,75	620,50
70		2,14	1,4	1,4	16,45	831,71
95	37	2,52	1,6	1,5	18,80	1.113,50
120		2,03	1,6	1,6	20,6	1.385,02
150		2,25	1,8	1,6	22,55	1.706,76
185		2,52	2,0	1,7	25,05	2.105,38
240	61	2,24	2,2	1,8	28,20	2.712,88

TABLA DE AMPERAJE CABLES DE FUERZA NOTOX (AMP)









DISPOSICION DE LOS CONDUCTORES TENDIDO TERRESTRE A 20°C				
SECCION MM <sup>2</sup>				
1.5	32	30	32	39
2.5	43	40	43	51
4	82	52	55	66
6	103	64	68	82
10	137	86	90	109
16	177	111	115	139
25	229	143	149	179
35	275	173	178	213
50	327	205	211	251
70	402	252	259	307
95	482	303	310	366
120	550	346	352	416
150	618	390	396	465
185	701	441	449	526
240	819	511	521	610

TABLA DE AMPERAJE CABLES DE FUERZA NOTOX (AMP)

DISPOSICION DE LOS CONDUCTORES TENDIDO AEREO A 30°C				
SECCION MM <sup>2</sup>				
1.5	32	24	25	32
2.5	43	32	34	42
4	57	42	44	56
6	72	53	57	71
10	99	73	77	96
16	131	96	102	128
25	177	130	139	173
35	218	160	170	212
50	266	195	208	258
70	338	247	265	328
95	416	305	326	404
120	487	355	281	471

